


# Bergmann Dumper 4010 HK



Wheel dumper | cab  
Rear Tip



- High stability thanks to low center of gravity
- Comfortable cab
- Inside oil bath multi disc brake
- Low ground pressure
- High traction

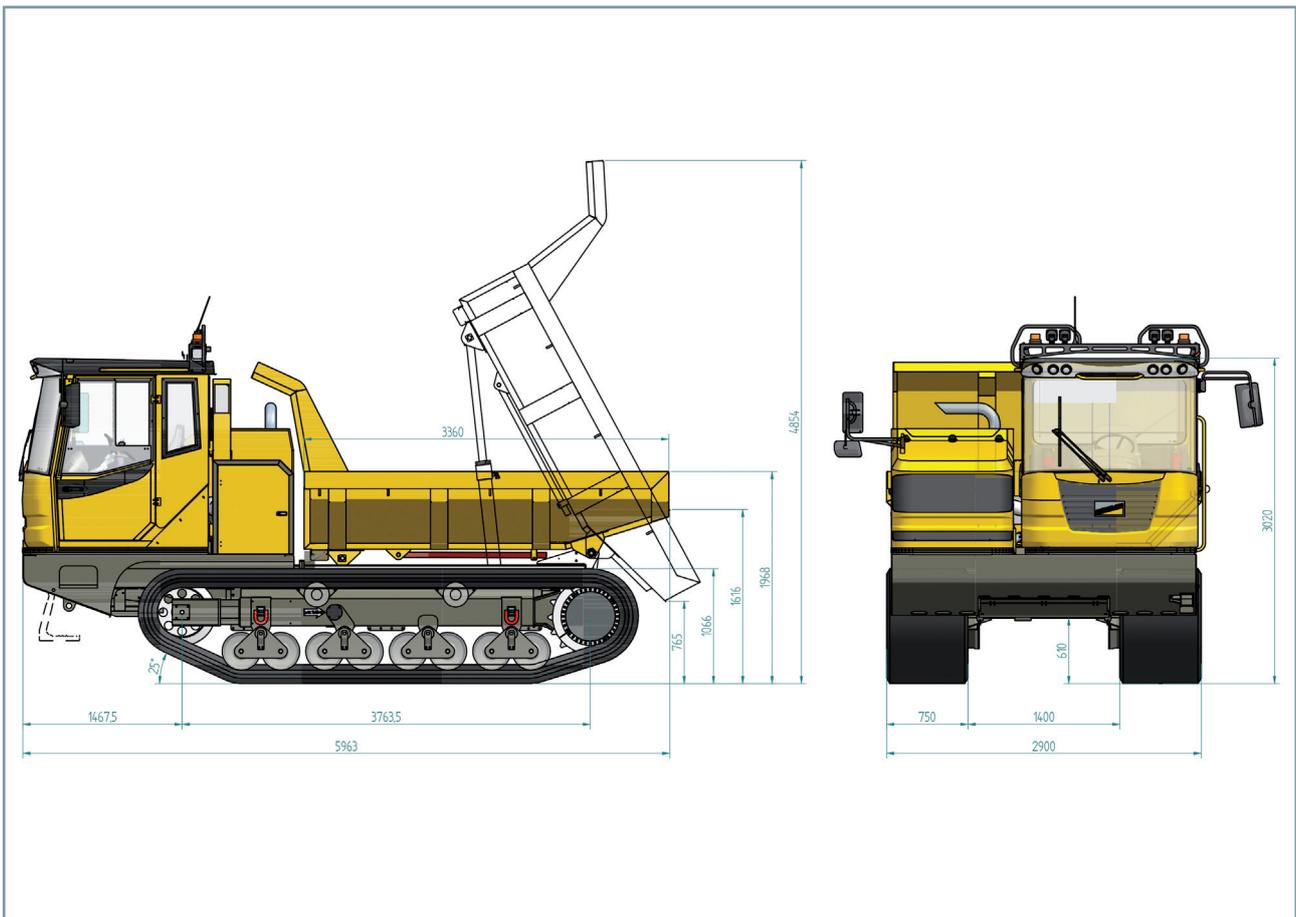

# 4010 HK

## Technical Data



Wheel dumper | cab  
Rear Tip

### Weight/Bucket Capacity

payload	10.000 kg
empty weight	14.250 kg
loading capacity struck	4,7 m <sup>3</sup>
loading capacity heaped	6,5 m <sup>3</sup>
bucket system	rear tip

### Dimensions

clearance height	3.020 mm
tipping height	765 mm
loading height (front)	1.968 mm
total length	5.963 mm
total width	2.900 mm
ground clearance	610 mm

### Transmission

hydrostatic drive with planetary transmission

### Speed

speed I	0–8 km/h
speed II	0–15 km/h

### Steering

steering wheel or joystick

### Brake System

inside oilbath multi disc brake

### Engine

6 cylinder Cummins diesel engine QSB 6.7 – water cooled –  
power 180 kW with 2.200 rpm

### Width of Tracks

750 mm

### Ground Pressure

0,46 kg/cm<sup>2</sup>

### Bonnet

fast and easy accessibility to all service points thanks to engine opening bonnet in two pieces

### Tank Capacity

fuel	225 L
hydraulic oil	180 L

### Electrics

24 V electric system with main switch, error detection mode, fuel and hour counter, control lamps for engine oil; park brake, direction indicator, battery charging control, hydraulic filter, display for drive position

### Standard Equipment

comfortable cab with air-suspended driver's seat, road traffic lighting system, bucket from wear-resistant fine-grain steel, beacon light, cigarette lighter, sun roller blind for front windscreen, device for radio, loudspeaker and antenna, CE certificate, manual and spare parts list

